


Flange with holes

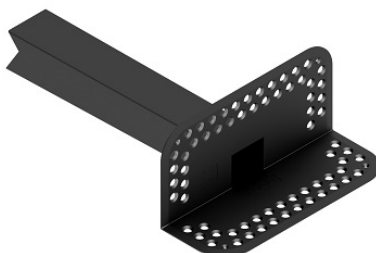


Function	The TPE REGULAR MIGNON FITTINGS are used to connect the waterproof bituminous felts when the rainwater drains from balconies are placed close to the wall. Their special design allows mignon fittings to be used in any design setting, even highly refined ones. The perforated flange promotes the perfect adhesion with the bituminous sheaths and the length of the shank lets the water flow away from vertical walls, also because of the anti-drop ribbing at the bottom. The rectangular section of the shank, slightly flared, allows for a rational and rapid disposal of the water and gives it a slight inclination to make it easier to install the fitting slantwise. Mignon fittings are recommended for the installation of horizontal drains. A sandwich installation between the two layers of membrane is recommended to achieve top performance.		
Compatibility	They are compatible with APP and SBS prefabricated bituminous felts and bituminous coats.		
Range	Shank external section: 57x50 on flange coupling, 61x54 final		
Performance	The elastic material they are made with ensures longterm watertightness. They provide excellent resilience to deterioration caused by the sun, ozone and other weather agents or chemicals normally found in the atmosphere. The elasticity of the material allows for excellent flexibility even at low temperatures, which ensures mechanical and physical properties are maintained over time.		
Operating temperature	-20°C; +75°C		
Included accessories:	-	Recycled product	No
Optional accessories:	-	Recyclable product	Yes
	-	Material	TPE
	-		
	-		

Additional information

To improve adhesion, a thin coat of primer can be applied on the fittings beforehand.

If not otherwise indicated, all measurements are expressed in millimetres.

Flange with holes

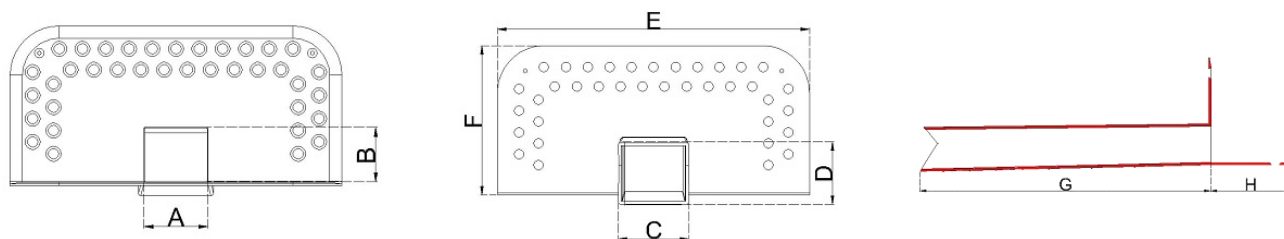

Line Item

Description

1 030-340-350-010

A	B	C	D	E	F	G	H	I
57	50	61	54	270	130	349,5	100	

If not otherwise indicated, all measurements are expressed in millimetres.